

# EPU 44

EPU 44 is a resilient elastomeric material that contains 40% biobased content, that enables high performance lattices with lower cost part economics.

## Table of Contents

Standard Technical Data Sheet:	<a href="#">Page 3-4</a>
Extended Technical Data Sheet:	<a href="#">Page 5-13</a>
- Mechanical Properties	<a href="#">Page 6</a>
- Thermomechanical Properties	<a href="#">Page 7-8</a>
- Compression Set	<a href="#">Page 9</a>
- Chemical Compatibility	<a href="#">Page 10</a>
- Water Uptake & Conditioned Properties Page	<a href="#">Page 11</a>

# EPU 44 Gray & White

Tensile Properties	Test Standard	Metric	US
Tensile Modulus	ASTM D412 Die C 500 mm/min	16 MPa	2300 psi
Elongation at Break		275%	275%
Stress at 50% Elongation		4 MPa	580 psi
Stress at 100% Elongation		8 MPa	1100 psi
Stress at 200% Elongation		20 MPa	2900 psi
Ultimate Tensile Strength		24 MPa	3500 psi

Other Mechanical Properties	Test Standard	Metric	US
Tear Strength	ASTM D624 Die C (die cut)	35 kN/m	200 lbf/in
Compression Set	ASTM D395-B 23 °C, 72 h	25%	
Ross Flexing Fatigue (Unnotched), 23 °C	Based on ASTM D1052 60° bending 100 cycles/min 2 mm thickness	> 100,000 cycles (no crack propagation)	
Ross Flexing Fatigue (Notched), -10 °C		> 100,000 cycles (no crack propagation)	

Thermal Properties	Test Standard	Metric	US
T <sub>g</sub> (DMA, tan(d))	ASTM D4065	-5 °C	23 °F

Dielectric/Electric Properties	Test Standard	Metric	US
Dielectric Constant	ASTM D150	4.26	
Dissipation Factor		0.0368	
Dielectric Strength	ASTM D149	17 kV/mm	
Volume Resistivity	ASTM D	1.1 x 10 <sup>11</sup> ohm-cm	

General Properties	Test Standard	Metric	US
Shore A Hardness	ASTM D2240	78 (Instant), 77 (5 sec)	
Bulk Density	ASTM D792	1.03 g/mL	
Relative Abrasion Volume Loss	ISO-4649 A	70 mm <sup>3</sup>	

The information in this document includes values derived from printing various parts, reflects an approximation of the mean value of a range of values, and is intended for reference and comparison purposes only. This information should not be used for testing, design specification or quality control purposes. End-use material performance can be impacted by, but not limited to, design, processing, color treatment, operating and end-use conditions, test conditions, etc. Actual values will vary with build conditions. In addition, product specifications are subject to change without notice.

This information and Carbon's technical advice are given to you in good faith but without warranty. The application, use and processing of these and other Carbon products by you are beyond Carbon's control and, therefore, entirely your own responsibility. Carbon products are only to be used by you, subject to the terms of the written agreement by and between you and Carbon.

You are responsible for determining that the Carbon material is safe, lawful, and technically suitable for the intended application, as well as for identifying the proper disposal (or recycling) method consistent with applicable environmental laws and regulations. CARBON MAKES NO WARRANTIES OF ANY KIND, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR USE, OR NON-INFRINGEMENT. Further, it is expressly understood and agreed that you assume and hereby expressly release Carbon from all liability, in tort, contract or otherwise, incurred in connection with the use of Carbon products, technical assistance and information. No license with respect to any intellectual property is implied.

Parts were processed using an L series printer and centrifugal spinner.

# EPU 44 Gray & White

Liquid Properties	
Liquid Density (Part A)	1.05 g/mL
Liquid Density (Part B)	0.94 g/mL
Liquid Density (Part A+B)	1.03 g/mL
Part A:B Volume Ratio (Mass Ratio)	Gray: 10.8 (12.0)
	White: 10.3 (11.4)
25 °C Viscosity (Part A)	8600 cP
25 °C Viscosity (Part B)	80 cP
25°C Viscosity (Part A+B)	6700 cP

The information in this document includes values derived from printing various parts, reflects an approximation of the mean value of a range of values, and is intended for reference and comparison purposes only. This information should not be used for testing, design specification or quality control purposes. End-use material performance can be impacted by, but not limited to, design, processing, color treatment, operating and end-use conditions, test conditions, etc. Actual values will vary with build conditions. In addition, product specifications are subject to change without notice.

This information and Carbon's technical advice are given to you in good faith but without warranty. The application, use and processing of these and other Carbon products by you are beyond Carbon's control and, therefore, entirely your own responsibility. Carbon products are only to be used by you, subject to the terms of the written agreement by and between you and Carbon.

You are responsible for determining that the Carbon material is safe, lawful, and technically suitable for the intended application, as well as for identifying the proper disposal (or recycling) method consistent with applicable environmental laws and regulations. CARBON MAKES NO WARRANTIES OF ANY KIND, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR USE, OR NON-INFRINGEMENT. Further, it is expressly understood and agreed that you assume and hereby expressly release Carbon from all liability, in tort, contract or otherwise, incurred in connection with the use of Carbon products, technical assistance and information. No license with respect to any intellectual property is implied.

Parts were processed using an L series printer and centrifugal spinner.

# EPU 44


## Extended TDS

# EPU 44 Mechanical Properties


## Representative Tensile Curve

ASTM D412, Die C, 500 mm/min

EPU 44 Gray

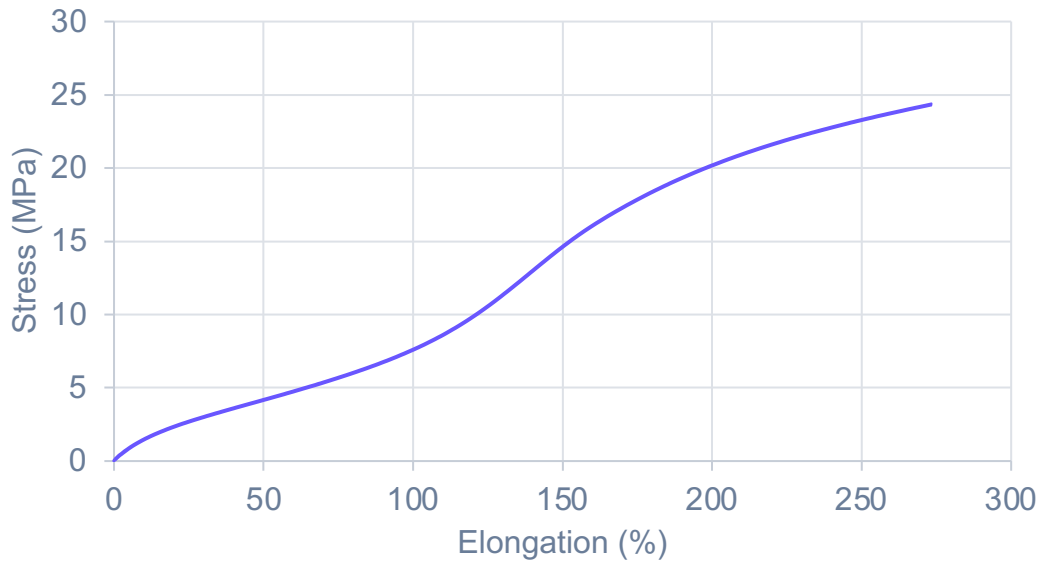


EPU 44 White

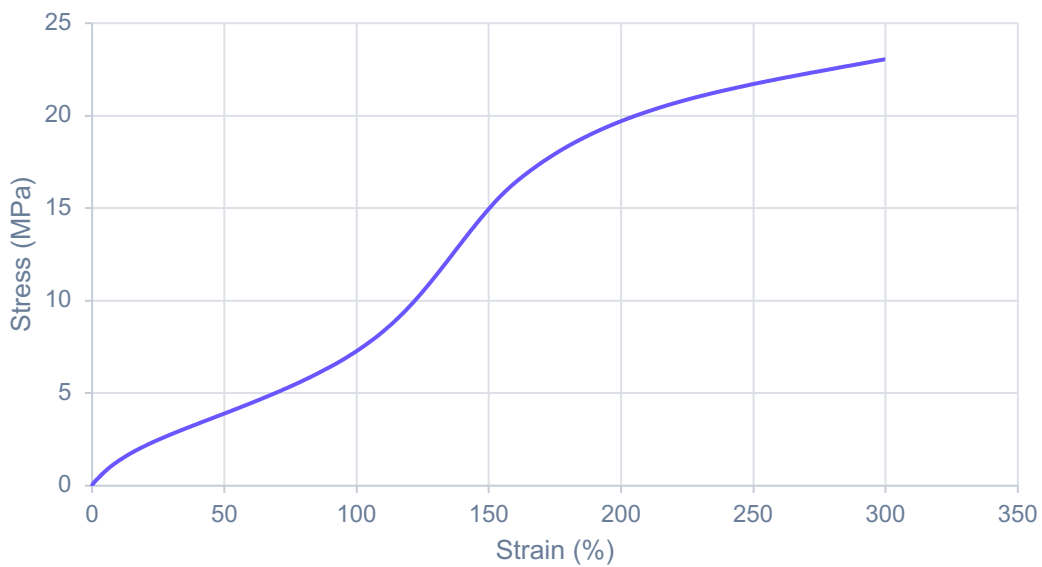

# Dynamic Mechanical Analysis (DMA)

## EPU 44 Gray vs White

The figure below shows the thermomechanical behavior of EPU 44 Gray and White are similar. EPU 44 has a  $T_g$  at  $-5\text{ }^\circ\text{C}$  and a room temperature storage modulus around 20 MPa.

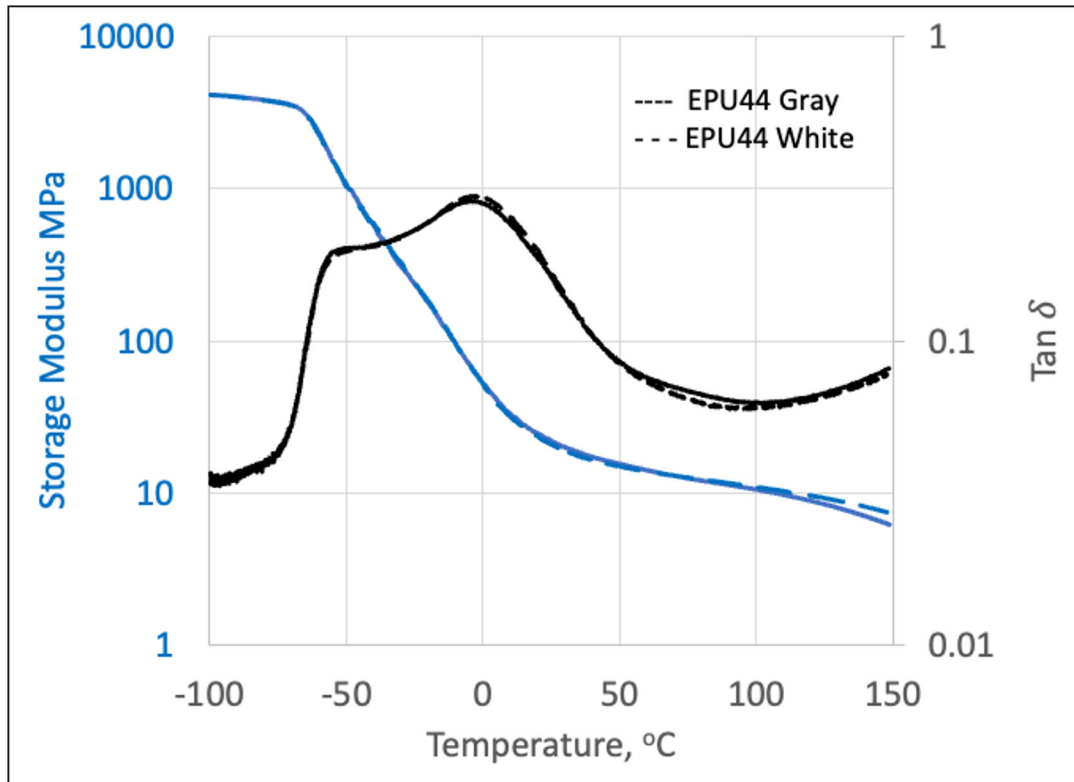


# Dynamic Mechanical Analysis (DMA)

Both EPU 41 Black and EPU 44 have improved cold temperature performance compared to EPU 40. EPU 44 has a  $T_g$  between EPU 41 Black and EPU 40. In addition, EPU 44 has the highest room temperature storage modulus and rubbery plateau compared to EPU 41 Black and EPU 40.

EPU 44 Gray  $T_g(\tan(\delta)) = -5\text{ }^\circ\text{C}$

EPU 41 Black  $T_g(\tan(\delta)) = -10\text{ }^\circ\text{C}$

EPU 40  $T_g(\tan(\delta)) = 10\text{ }^\circ\text{C}$

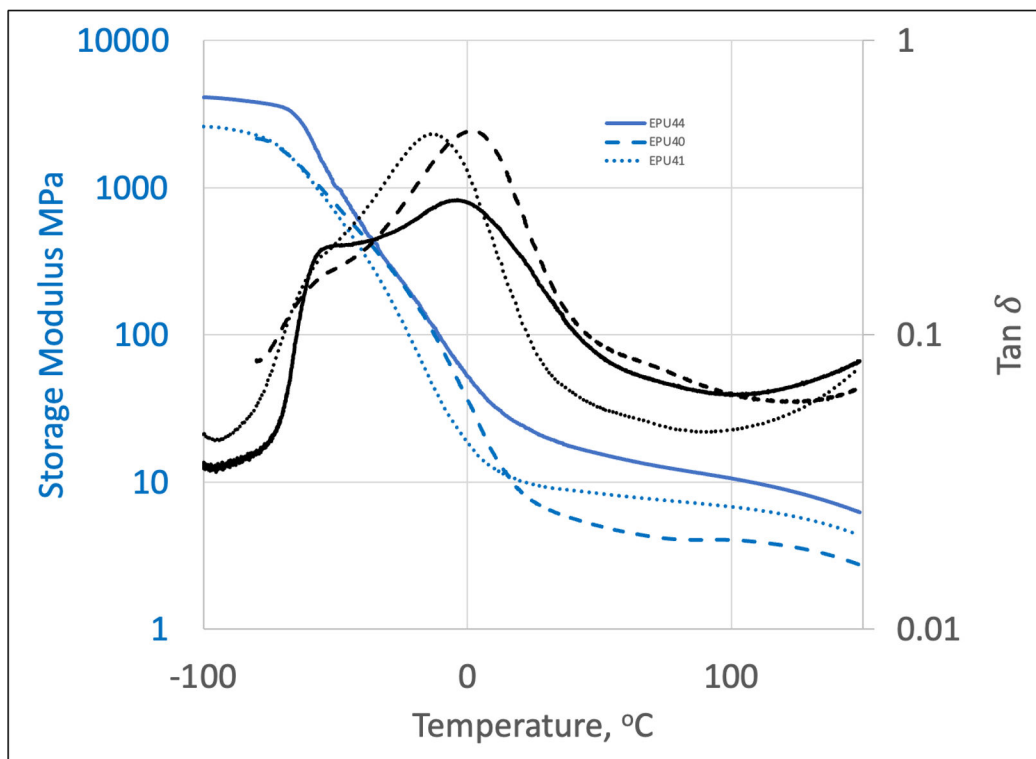

ASTM D4065


Q800 Tension Mode, Ramp Rate 2 °C/min, 1 Hz, 0.1% strain

Samples were post processed using DPM Smart Part Washer.



# EPU 44 Compression Set

In many elastomeric applications, compression set is an important property that reflects the amount of residual deformation after holding compression at a fixed time, temperature and displacement. EPU 40, EPU 41 Black, EPU 44 Gray, EPU 44 White, and SIL 30 were compressed to 25% of its original sample height and held at various temperatures (-20, 4, 23, and 70 °C) for 72 hours. The compression set measurement is the residual deformation of a test specimen where 0% represents full recovery of the original thickness and 100% indicates no recovery. The image below summarizes the compression set results for various Carbon elastomers.

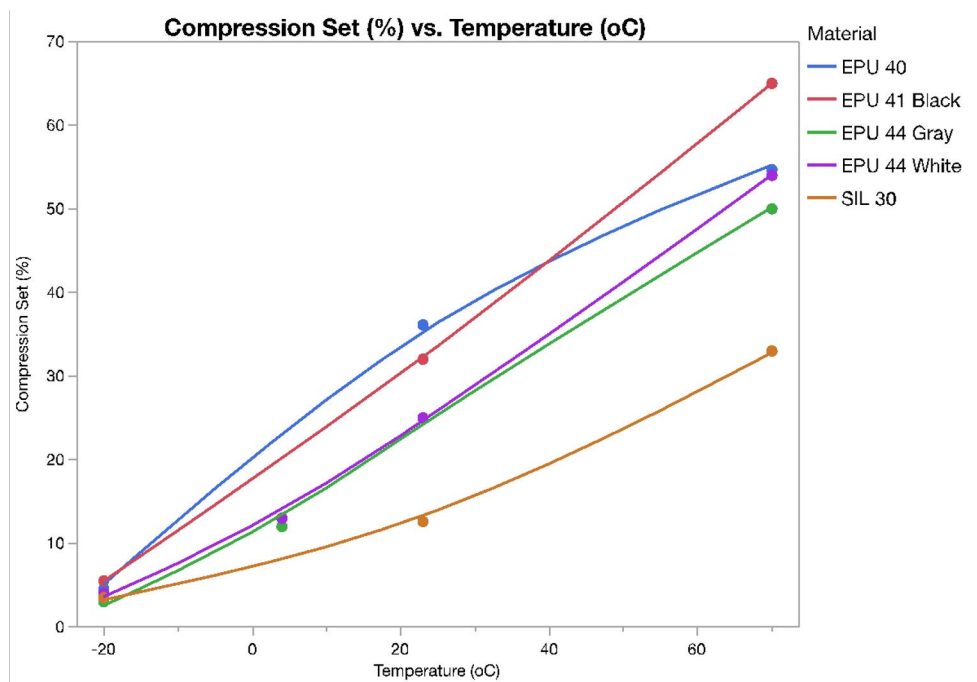

ASTM D394-14 Method B

# EPU 44 Chemical Compatibility

	Mass Gain* (%)
<b>Household Chemicals</b>	
Bleach (NaClO, 5%)	< 5%
Sanitizer (NH <sub>4</sub> Cl, 10%)	5 - 15%
Distilled Water	5 - 15%
Sunscreen (Banana Boat, SPF 50)	5 - 15%
Detergent (Tide, Original)	5 - 15%
Windex Powerized Formula	15 - 30%
Hydrogen Peroxide (30%)	> 30%
Ethanol (95%)	> 30%
<b>Industrial Fluids</b>	
Diesel (Chevron #2)	< 5%
<b>Strong Acid/Base</b>	
Sulfuric Acid (30%)	5 - 15%
Sodium Hydroxide (10%)	< 5%

*\*Percent weight gained after one week submersion following ASTM D543. Values do not represent changes in dimension or mechanical properties.*

# EPU 44 Gray and White Biocompatibility

## Biocompatibility Testing

Printed parts were provided to NAMSA for evaluation in accordance with ISO 10993-10, *Biological evaluation of medical devices - Part 10: Tests for irritation and skin sensitization* (specifically the Closed Patch Sensitization Study and dermal contact irritation). Parts were processed using an L series printer and centrifugal spinner. The results for all tests indicated that EPU 44 passed the requirements for biocompatibility according to the above tests. **Carbon makes no representation and is not responsible for the results of any biocompatibility tests other than those specified above.**

## Disclaimer

Biocompatibility results may vary based on printing and/or post-processing procedures.

Subscriber acknowledges the contents of this document are subject to the Terms and Conditions outlined in the Subscription Agreement, including the Restrictions on Use section.

DO NOT USE CARBON MATERIALS IN MEDICAL APPLICATIONS INVOLVING IMPLANTATION IN THE HUMAN BODY OR CONTACT WITH BODY FLUIDS OR TISSUES UNLESS THE MATERIAL HAS BEEN PROVIDED FROM CARBON UNDER A WRITTEN CONTRACT THAT IS CONSISTENT WITH THE CARBON POLICY REGARDING MEDICAL APPLICATIONS AND EXPRESSLY ACKNOWLEDGES THE CONTEMPLATED USE. CARBON MAKES NO REPRESENTATION, PROMISE, EXPRESS WARRANTY OR IMPLIED WARRANTY CONCERNING THE SUITABILITY OF THESE MATERIALS FOR USE IN IMPLANTATION IN THE HUMAN BODY OR IN CONTACT WITH BODY FLUIDS OR TISSUES. If Carbon has permitted in the Subscription Agreement use of the Carbon printer for applications that require biocompatibility, Subscriber acknowledges that it is the responsibility of Subscriber, its respective customers and end-users to determine the biocompatibility of all printed parts for their respective uses.

Carbon, Inc. | [www.carbon3d.com](http://www.carbon3d.com)  
1089 Mills Way Redwood City, CA 94063  
1 (650) 285-6307